

Berneer[®]

10 Inch Color TFT-LCD CCTV Monitor

Features

- 10.4 Inch Color TFT-LCD CCTV Monitor
- PAL/NTSC Compatible
- BNC Video, VGA and S-Video Inputs
- High-resolution display, up to 800×600(H×V)
- Contrast Ratio: 500:1
- Brightness: 400cd/m²
- Viewing Angle(R/L/U/D): 60°/60°/40°/30°
- Seat bracket and wall mount bracket available
- World wide power input AC100V~AC240V



Specifications

Model	BN-ML10
Screen Size	10.4 Inch Color TFT-LCD CCTV Monitor
Aspect Ratio	4:3
Pixel Pitch	0.264mm×0.264mm(H×V)
Maximum Resolution	800×600
Contrast Ratio	500:1
Brightness	400cd/m ²
Response Time	8ms
Viewing Angle(R/L/U/D)	60°/60°/40°/30°
Video System	PAL/NTSC, auto-identification
Supported Resolution	640×480(60/72/75HZ),800×600(60/72/75HZ)
video Input	1 channel, BNC(1.0Vp-p, 75Ω)
VGA Input	1 (15pin D-SUB)
S-Video Input	1
Video Output	1 channel, BNC, 1.0Vp-p, 75Ω



Audio Input	1 channel, RCA
Audio Output	1 channel, RCA
Scan Mode	Progressive
Picture Feature	3D filtering (PAL/NTSC), 3D noise reduction, HD (high definition) signal, 10-bit TFT-LCD panel drive (better color transition, WCG-CCFL backlight)
Speaker	1pair, 16ohm/3W
Menu Language	English/Chinese (multi languages customizable)
Installation Mode	VESA mount/Customize
Structure	Strong metal shell, anti-static, anti-magnetic field, anti-interference
Panel Color	Black/Customize
Life Span(hrs)	50,000(hrs)
Power Consumption	Status of work: <25W; Stand By Power (DPMS): <1W
Power Supply	AC100V~AC240V,50/60Hz
Operating Temp	0°C ~ 50°C
Operating Humidity	20% ~ 80%(Non condensing)
Storage Temp	-10°C ~ 60°C
Storage Humidity	5 - 95%(Non condensing)
Weight	Product Weight:2kg,Shipment Weight:3.2kg(With seat bracket)
Dimensions	Product Dimension:268×206×43mm,Shipment Dimension:422×365×163mm
Appendix	User manual/Guarantee card/Wire/VGA cable/Wall mount bracket (optional)/Adapter

Accessory Series




Remote control

Dimensions diagram

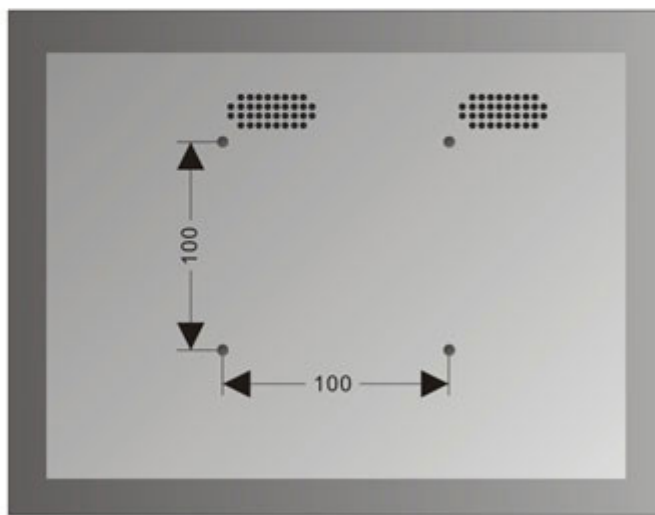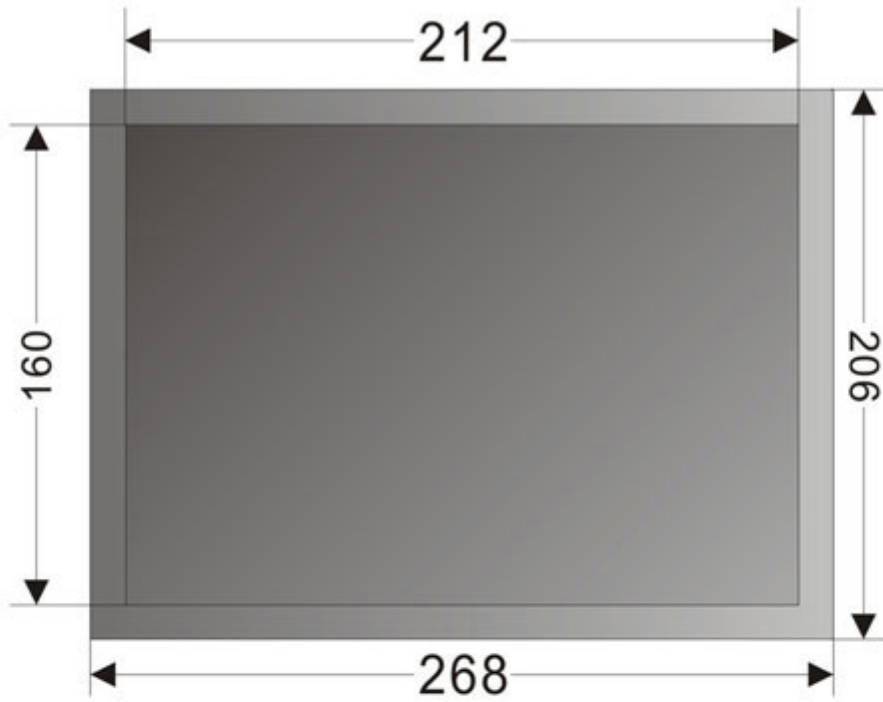

● 4mm screw

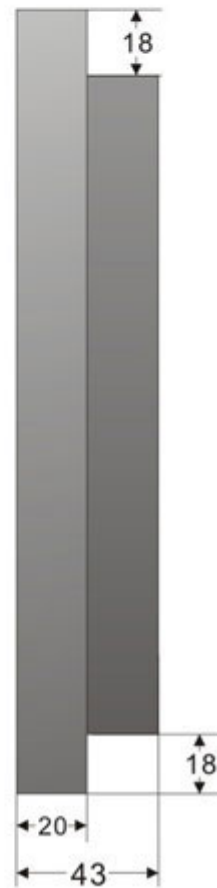

10.4"