

# Berneer®

## 25m-IR Waterproof Camera (Shape E)

### Features

- IR-waterproof box camera
- Day/night with IR filter
- 6mm(3.6mm,8mm,12mm) board lens
- $\Phi 5 \times 30$ PCS IR LED, Longest IR distance: 25 meters
- IR LED turned on or off controlled by CDS
- Power supply DC12V
- Waterproof and dustproof reaching IP66 standard
- Standard unit comes with adjustable bracket
- Suitable for both indoor and outdoor use



### Models

BN-1325Q/SS-E	540 TV lines, 1/3" Sony Super HAD CCD, 0.1Lux, SONY 2613 DSP
BN-1325Q/SN-E	540 TV lines, 1/3" Sony Super HAD CCD, 0.1Lux, NEXTCHIP DSP
BN-1325H/SS-E	480 TV lines, 1/3" Sony Super HAD CCD, 0.1Lux, SONY 2613 DSP
BN-1325H/SN-E	480 TV lines, 1/3" Sony Super HAD CCD, 0.1Lux, NEXTCHIP DSP
BN-1325E/SN-E	450 TV lines, 1/3" Sony Super HAD CCD, 0.1Lux, NEXTCHIP DSP
BN-1325D/SS-E	420 TV lines, 1/3" Sony Super HAD CCD, 0.1Lux
BN-1325D/HH-E	420 TV lines, 1/3" Sharp CCD, 0.5Lux
BN-1425D/HH-E	420 TV lines, 1/4" Sharp CCD, 0.5Lux

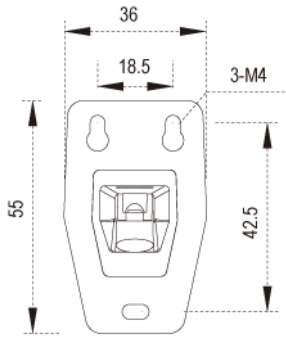
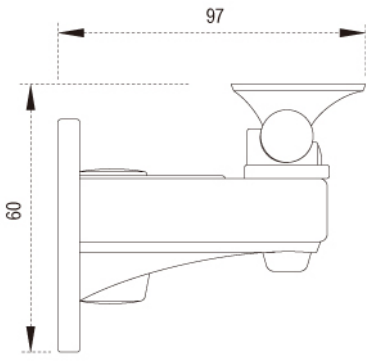
### Specifications



Horizontal Resolution	540/480/450/420 TV Lines available
Electronic Shutter	PAL=1/50 -1/100,000 sec, NTSC=1/60 -1/100,000 sec
Pixel	480/540 TV lines PAL: 752×582,NTSC: 768×494(H×V)
	420/450 TV lines PAL: 500×582,NTSC: 510×492(H×V)
Lens	6mm(3.6mm,8mm,12mm) board lens
IR Distance	25 meters
IR Status	Light below 10 Lux, CDS automatically open

Power Supply	DC12V
Power Consumption	249-332mA
Dimension	175× 75 × 136mm (L×W×H) include bracket
Weight	0.555kg
Operating Temperature	-10 ~ 50°C (Relative Humidity: 95% max.)

## Bracket Dimension

Back View	Side View
 <p>Technical drawing showing the back view of the bracket. Dimensions include a width of 36mm, a mounting hole spacing of 18.5mm, three M4 mounting holes, a total height of 55mm, and a mounting hole offset of 42.5mm.</p>	 <p>Technical drawing showing the side view of the bracket. Dimensions include a depth of 97mm and a height of 60mm.</p>