

Berneer[®]

70 Inch Color TFT-LCD CCTV Monitor

Features

- 70 Inch Color TFT-LCD CCTV Monitor
- PAL/NTSC Compatible
- BNC Video, VGA and Analog RGB Inputs
- High-resolution display, up to 1920×1080(H×V)
- Contrast Ratio: 1500:1
- Brightness: 600cd/m²
- Viewing Angle(R/L/U/D): 89°/89°/89°/89°
- Support dual-screen function (PIP/POP)
- Seat bracket and wall mount bracket available
- World wide power input AC100V~AC240V





Specifications


Model	BN-ML70
Screen Size	70 Inch Color TFT-LCD CCTV Monitor
Aspect Ratio	16:9
Pixel Pitch	0.264mm×0.264mm(H×V)
Maximum Resolution	1920×1080
Contrast Ratio	1500:1
Brightness	600cd/m ²
Response Time	8ms
Viewing Angle(R/L/U/D)	89°/89°/89°/89°
Video System	PAL/NTSC, auto-identification
Supported Resolution	640×480(60/72/75HZ), 800×600(60/72/75HZ), 1024×768(60/72/75HZ), 1280×1024(60/72/75HZ), 1366×768(60/72/75HZ), 1920×1080(60HZ)
video Input	2 channel, BNC, 1.0Vp-p, 75Ω
VGA Input	1 (15pin D-SUB)

Analog RGB Input	1 (BNC×3)
Video Output	1 channel, BNC, 1.0Vp-p, 75Ω
Audio Input	1 channel, RCA
Audio Output	1 channel, RCA
HDMI Interface	Standard: without(Customizable)
Scan Mode	Progressive
Dual Screen	PIP/POP
Picture Feature	3D filtering (PAL/NTSC), 3D noise reduction, HD (high definition) signal, 10-bit TFT-LCD panel drive (better color transition, WCG-CCFL backlight)
Speaker	1pair, 16ohm/3W
Menu Language	English/Chinese (multi languages customizable)
Installation Mode	VESA mount/Customize
Structure	Strong metal shell, anti-static, anti-magnetic field, anti-interference
Panel Color	Black/Customize
Life Span(hrs)	50,000(hrs)
Power Consumption	Status of work: <1500W; Stand By Power (DPMS):<3W
Power Supply	AC100V~AC240V,50/60Hz
Operating Temp	0°C ~ 50°C
Operating Humidity	20% ~ 80%(Non condensing)
Storage Temp	-10°C ~ 60°C
Storage Humidity	5 - 95%(Non condensing)
Dimensions	1678×1000×142mm
Appendix	User manual/Guarantee card/Wire/VGA cable/Wall mount bracket (optional)/Adapter


Accessory Series

	
<p>Wall mount bracket(Optional)</p>	<p>Remote control</p>

Dimensions

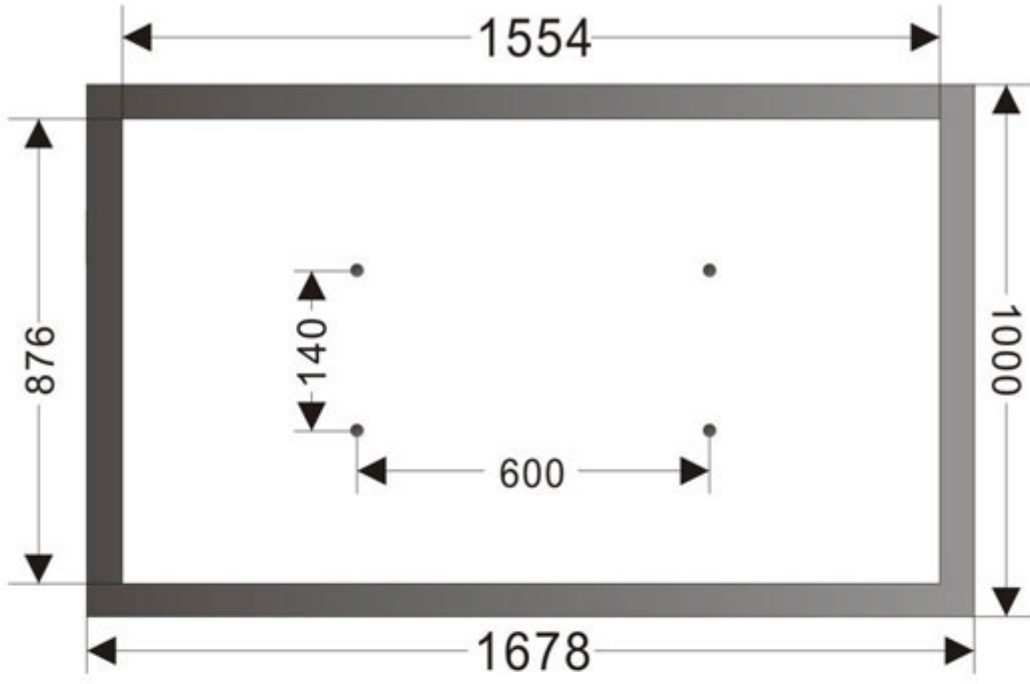

● 6mm screw

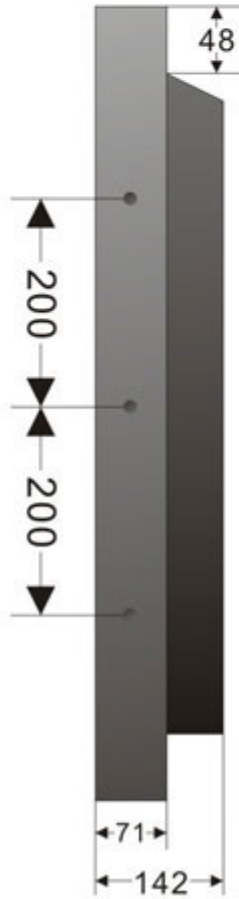

70"