

# Berneer®

# 12 Inch/15 Inch Outdoor Camera Housing

## Features


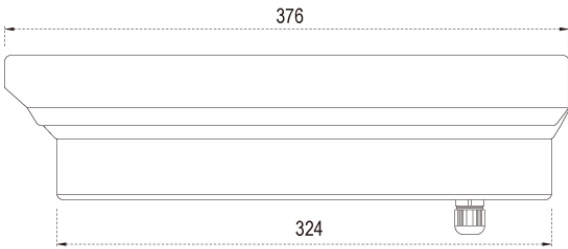
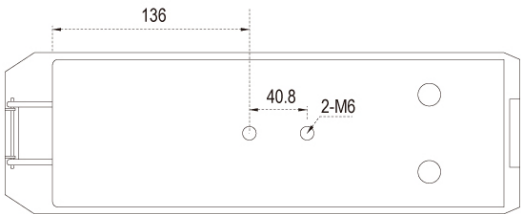

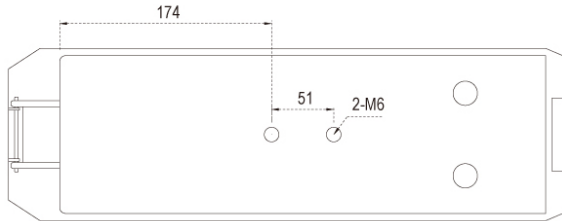
- Dimension: 12inch/15inch
- Body is die-casting aluminum
- Fore-opening roof assisted by spring pole, easy to install camera
- Installation mode: wall mounted
- Use environment: indoor/outdoor
- Protection grade: IP66
- Built In Heater/Blower/Wiper (Optional)
- Suitable bracket: BN-B206, BN-B227(with BN-B230)



## Specifications

Models	BN-7012	BN-7012SFH	BN-7015	BN-7015SFH
Material	Body: aluminum die-casting, Window: optical glass			
Dimensions	376×136×103.5 mm(L×W×H)		452×136×103.5 mm(L×W×H)	
Optional Inner Dimensions	209×90×72.5 mm(L×W×H)	174×90×72.5 mm(L×W×H)	285×90×72.5 mm(L×W×H)	250×90×72.5 mm(L×W×H)
Blower & Heater	No	With	No	With
Input voltage	AC24V or AC220V (Please mark voltage when place the order)			
Heater Switch	ON: 8°C, OFF: 20°C			
Blower Switch	ON: 37°C, OFF: 20°C			
Power Consumption	Heater: 50W Blower: 8W			
Window Dimension	67×57mm(H)			
Connection Hole	Φ11.9mm x 2mm			
Weight	1.9kg	2.1kg	2.6kg	2.8kg
Use Environment	Indoor/Outdoor			
Operating Temperature	-5°C~45°C	-25°C~60°C	-5°C~45°C	-25°C~60°C

# Dimensions

<p>Back View (BN-7012/7012SFH)</p>	<p>Bottom View (BN-7012/7012SFH)</p>
	
	<p>Side View (BN-7012/7012SFH)</p>
	
<p>Back View (BN-7015/7015SFH)</p>	<p>Bottom View (BN-7015/7015SFH)</p>
	
	<p>Side View (BN-7015/7015SFH)</p>
	