

Berneer[®]

30m-IR Waterproof Camera (Shape D)

Features

- IR-waterproof box camera
- Day/night with IR filter
- 6mm (4mm, 8mm, 12mm) IR lens, CS mount
- $\Phi 5 \times 36$ PCS IR LED, Longest IR distance:30 meters
- IR LED turned on or off controlled by CDS
- Standard unit comes with adjustable bracket, with cable attached
- Waterproof and dustproof reaching IP66 standard.
- Suitable for both indoor and outdoor use.



Models

BN-1330Q/SS-D	540 TV lines, 1/3" Sony Super HAD CCD, 0.1Lux, SONY DSP
BN-1330Q/SN-D	540 TV lines, 1/3" Sony Super HAD CCD, 0.1Lux, NEXTCHIP DSP
BN-1330H/SS-D	480 TV lines, 1/3" Sony Super HAD CCD, 0.1Lux, SONY 2613 DSP
BN-1330H/SN-D	480 TV lines, 1/3" Sony Super HAD CCD, 0.1Lux, NEXTCHIP DSP
BN-1330E/SN-D	450 TV lines, 1/3" Sony Super HAD CCD, 0.1Lux, NEXTCHIP DSP
BN-1330D/SS-D	420 TV lines, 1/3" Sony Super HAD CCD, 0.1Lux
BN-1330D/HH-D	420 TV lines, 1/3" Sharp CCD, 0.5Lux
BN-1430D/HH-D	420 TV lines, 1/4" Sharp CCD, 0.5Lux


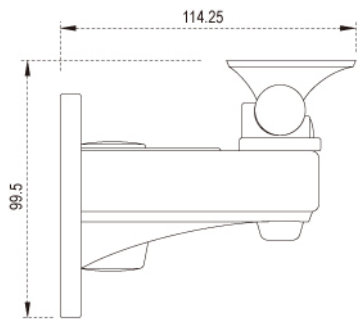
Specifications



Horizontal Resolution	540/480/450/420 TV Lines available
Electronic Shutter	PAL=1/50 -1/100,000 sec, NTSC=1/60 -1/100,000 sec
Pixel	480/540 TV lines PAL: 752×582,NTSC: 768×494(H×V)
	420/450 TV lines PAL: 500×582,NTSC: 510×492(H×V)
Lens	6mm (4mm, 8mm, 12mm) IR lens, CS mount
IR Distance	30 meters
IR Status	Light below 10 Lux, CDS automatically open

Power Supply	DC12V
Power Consumption	283-366mA
Dimension	146 × 83 × 80mm(L×W×H) include bracket
Net Weight	0.91kg
Operating Temperature	-10 ~ 50°C (Relative Humidity: 95% max.)

Bracket Dimension

Back View	Side View
 <p>Technical drawing showing the back view of the bracket. Dimensions include: 52 (top width), 28 (inner top width), 4-M5 (top hole), 86.5 (total height), 70.25 (height to top hole), and 24.5 (bottom width).</p>	 <p>Technical drawing showing the side view of the bracket. Dimensions include: 114.25 (total length) and 99.5 (height).</p>