

# Berneer<sup>®</sup>

## 26 Inch Color TFT-LCD CCTV Monitor

### Features

- 26 Inch Color TFT-LCD CCTV Monitor
- PAL/NTSC Compatible
- BNC Video, VGA and Analog RGB Inputs
- High-resolution display, up to 1366×768(H×V)
- Contrast Ratio: 1000:1
- Brightness: 500cd/m<sup>2</sup>
- Viewing Angle(R/L/U/D):85°/85°/85°/85°
- Support dual-screen function (PIP/POP)
- Seat bracket and wall mount bracket available
- World wide power input AC100V~AC240V





### Specifications



Model	BN-ML26
Screen Size	26 Inch Color TFT-LCD CCTV Monitor
Aspect Ratio	16:9
Pixel Pitch	0.4215mm×0.4215mm(H×V)
Maximum Resolution	1366×768
Contrast Ratio	1000:1
Brightness	500cd/m <sup>2</sup>
Response Time	8ms
Viewing Angle(R/L/U/D)	85°/85°/85°/85°
Video System	PAL/NTSC, auto-identification
Supported Resolution	640×480(60/72/75HZ),800×600(60/72/75HZ), 1024×768(60/72/75HZ), 1280×1024(60/72/75HZ),1366×768(60/72/75HZ)
video Input	2 channel, BNC, 1.0Vp-p, 75Ω
VGA Input	1 (15pin D-SUB)

Analog RGB Input	1 (BNC×3)
Video Output	1 channel, BNC, 1.0Vp-p, 75Ω
Audio Input	1 channel, RCA
Audio Output	1 channel, RCA
HDMI Interface	Standard: without(Customizable)
Scan Mode	Progressive
Dual Screen	PIP/POP
Picture Feature	3D filtering (PAL/NTSC), 3D noise reduction, HD (high definition) signal, 10-bit TFT-LCD panel drive (better color transition, WCG-CCFL backlight)
Speaker	1pair, 16ohm/3W
Menu Language	English/Chinese (multi languages customizable)
Installation Mode	VESA mount/Customize
Structure	Strong metal shell, anti-static, anti-magnetic field, anti-interference
Panel Color	Black/Customize
Life Span(hrs)	50,000(hrs)
Power Consumption	Status of work: <220W; Stand By Power (DPMS): <3W
Power Supply	AC100V~AC240V,50/60Hz
Operating Temp	0°C ~ 50°C
Operating Humidity	20% ~ 80%(Non condensing)
Storage Temp	-10°C ~ 60°C
Storage Humidity	5 - 95%(Non condensing)
Weight	Product Weight:8.5kg,Shipment Weight:11.7kg(With wall mount bracket)
Dimensions	Product Dimension:654×402×95mm,Shipment Dimension:708×607×255mm
Appendix	User manual/Guarantee card/Wire/VGA cable/Wall mount bracket (optional)/Adapter

## Accessory Series

	
<p>Wall mount bracket(Optional)</p>	<p>Remote control</p>

# Dimensions diagram

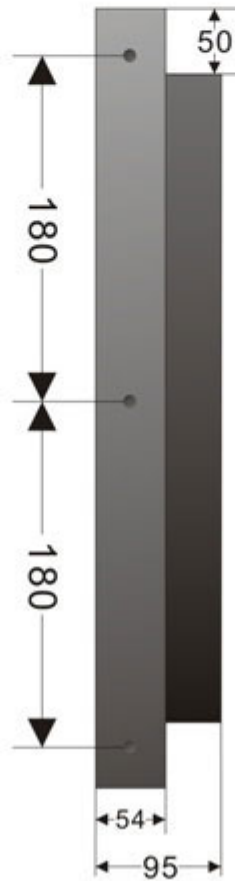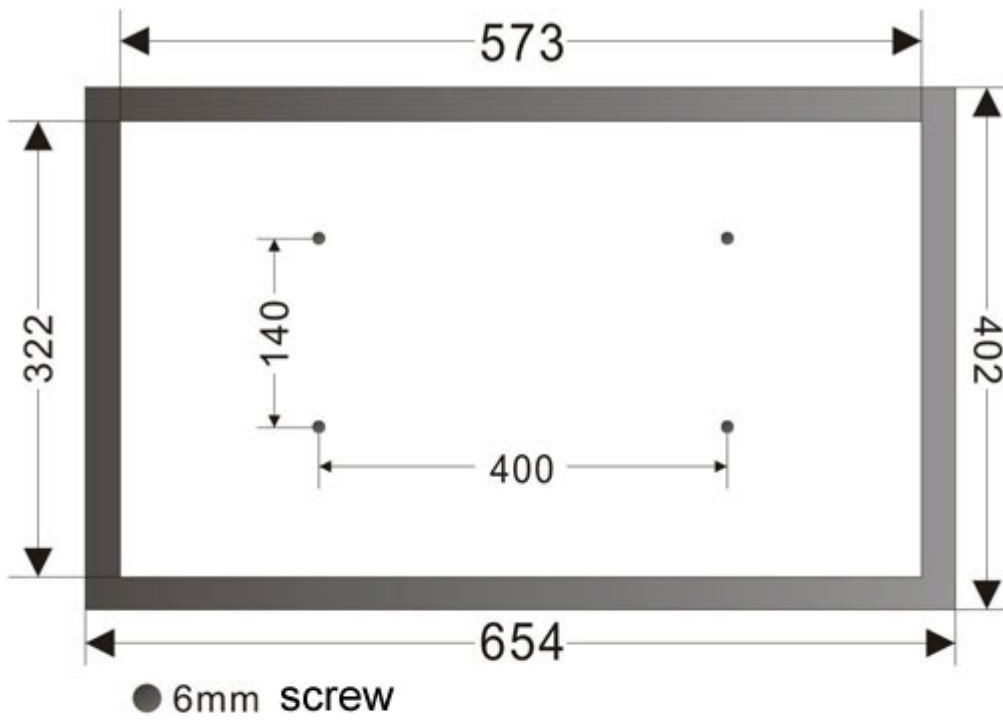

26"